


# Recessed spotlights

## PUNTA NRL



- Lighting technology LED
- Tilting and turning (360°/42°)
- With integral reflector SP, MFL or FL
- Supply unit included
- Connection data: 220-240 V, 50/60 Hz
- Connection to power supply by Wieland plug GST18i3; wire length l = 0.5 m
- DALI control system is possible
- Weight approx. 0.5 kg
- Colors: white/anthracite/silver

ERC  IP20

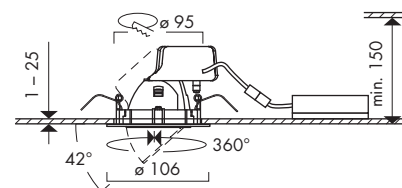

Photometric data	CRI Light colour	Lumen category	P <sub>system</sub>	Efficiency	Reflector
	830	850 lm	10 W	85 lm/W	SP MFL FL
840 930	Photometric data on request				

The photometric values are standard values and refer to the entire luminaire.

