




- Lighting technology LED
- Tilting and turning (360°/30°)
- With integral reflector SP, MFL, FL or WFL
- Supply unit included
- Connection data: 220-240 V, 50/60 Hz
- DALI and EASY-Lighting control system is possible
- Weight approx. 0.8 kg



Dimension

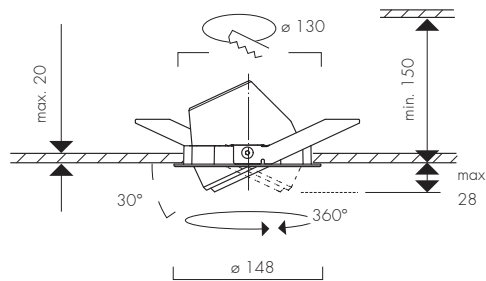

Photometric data

Lumen category _{system}	P _{system}	Efficiency	CRI/CCT	Reflector
2000lm	17W	125lm/W	830	SP, MFL
3000lm	29W	107lm/W		FL, WFL

The photometric values are standard values and refer to the entire luminaire.
 In the case of CRI ≥ 90 the efficiency is approx. 10-15 % lower.
 840, 927, Brilliant (930) - Photometric data on request

